


## SL2460 Squared Recessed LED Downlight

The Superlight SL2460 is a square architectural recessed LED downlight with a recessed light source aspect for reduced glare and aesthetic. The fitting body has an internal tilt adjustment for specific task lighting applications.

### SPECIFICATIONS

Driver Input Voltage:	220-240VAC
Max Power Consumption:	13W
Trim Dimensions:	102x102mm
Ceiling Cutout:	90mm
Fitting Depth:	130mm
LED Classification:	Sharp COB LED
Materials:	Aluminium Alloy 1090
Standard Baffle:	Black Internal Baffle
Typical Light Source Efficacy:	100lm/W
LED Beam Angle:	60°
LED Driver Power Factor:	→0.85
Recommended Ambient Temperature:	-10 ~ +40°C
IP Protection Rating:	IP20

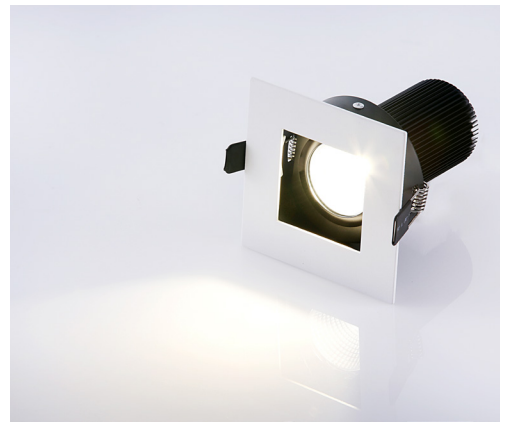

### PHOTOMETRIC INFORMATION

- SL2460-15 CCT: 6000K CRI: →90 ●
- SL2460-17 CCT: 4000K CRI: →90 ●
- SL2460-21 CCT: 3200K CRI: →90 ●

Detailed photometric report and IES files available by request

### TYPICAL APPLICATIONS

Residential projects, retail and shopfitting projects, common areas, general purpose lighting, kitchen lighting, commercial spaces.

### 3D MODELLING & LIGHTING DESIGN

Superlight can provide detailed 3D modelling and lighting design services for your project, including wiring schematics and lighting control system design. Contact us for more information.

### CONTROL & DIMMING COMPATIBILITY

Superlight SL2460 LED downlights are supplied with phase control dimmable LED drivers

Optional DALI dimmable LED driver is available by special request

Optional 1-10V dimmable LED driver is available by special request

### CUSTOMIZATION OPTIONS

Fixture trim colour can be refinished by special request

\*\*Custom options may be subject to minimum order quantities

### ORDERING INFORMATION

- SL2460-21 Superlight Square Recessed LED Downlight 12W 3200K ●
- SL2460-17 Superlight Square Recessed LED Downlight 12W 4000K ●
- SL2460-15 Superlight Square Recessed LED Downlight 12W 6000K ●