
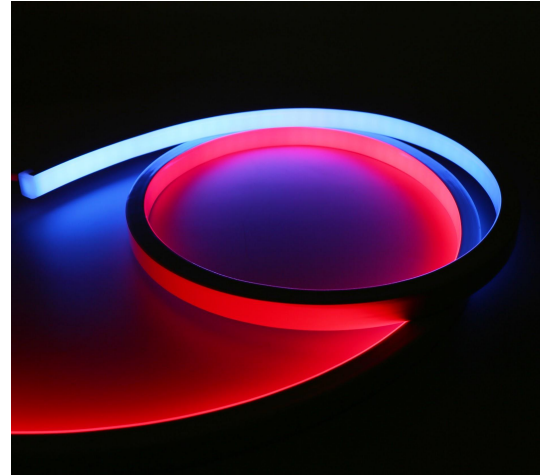


FLX974 PROFESSIONAL LED FLEXLITE 16.5x16.5MM DMX512

Superlight LED Flexlite is a professional linear lighting product that is ideal for a wide range of applications. The high power LED technology delivers smooth and vibrant illumination for both direct and indirect lighting applications. Flexlite is versatile and flexible. Optional accessories including mounting track profiles, hardware and other accessories are available also.

SPECIFICATIONS


Input Voltage:	24VDC
Power Consumption:	5-18W Per Mtr
IP Rating:	IP67 / IP68
LED Classification:	SMD
Viewing Angle:	180°
Dimensions - Width:	16.5mm
Dimensions - Height:	16.5mm
Operating Temperature:	-5 - +55°C
Power Connector:	Factory Moulded or DIY Connector
Available Lengths:	Superlight can customise lengths as required

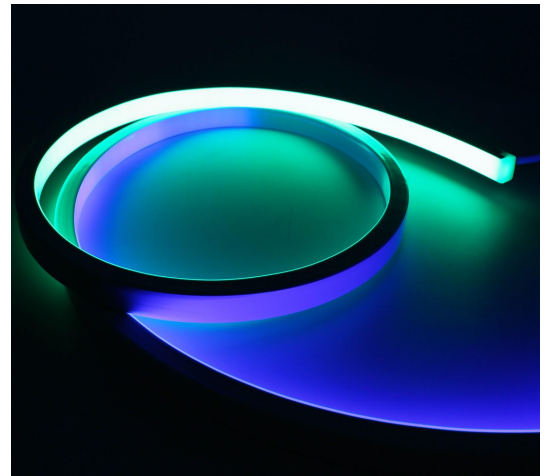

TYPICAL CONFIGURATIONS

- Tunable White
- 2200K
- 2700K
- 3000K
- 4000K
- RGB / RGBW

DIGITAL CHASING
DMX512/SPI

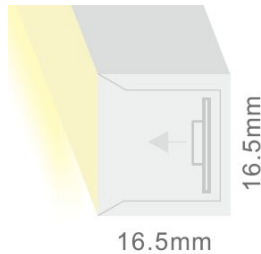

Colour tunable CCT, warm-dim, and other customised configurations available by request

APPLICATIONS

Bordering architecture, signage applications, outdoor decorative lighting, Direct linear lighting, coffer lighting, landscape linear lighting, water feature lighting, hotels, hospitality, venues, special effects, decorative installations,

CONTROL & DIMMING COMPATIBILITY

LED Flexlite is dimmable and can be configured for use with DALI, DMX512, 1-10V, phase dimming and other control protocols. RGB and RGBW Flexlite can be operated with Superlight RGBW control systems inc DM512 and others.

ORDERING INFORMATION

FLX974	Flexlite 16.5x16.5mm
FLX974-91	Aluminium Mounting Channel - 1mtr
FLX974-92	Aluminium Mounting Channel - 2mtr
FLX974-91L	Aluminium Locking Channel - 2mtr
FLX974-75	35mm Aluminium Fixing Clip - pack 50pcs
FLX974-91F	Flexible Stainless Steel Channel - 1mtr

CUSTOMISATION OPTIONS

Lengths can be customised by Superlight according to site requirements
Factory injection moulded accessories available by request
RGB and RGBW versions are fully colour change controllable
Optional aluminium or PVC mounting track accessories available by request

All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.

