


FLX976 PROFESSIONAL LED FLEXLITE 11.5X29MM DMX512/SPI

Superlight LED Flexlite is a professional linear lighting product that is ideal for a wide range of applications. The high power LED technology delivers smooth and vibrant illumination for both direct and indirect lighting applications. Flexlite is versatile and flexible. Optional accessories including mounting track profiles, hardware and other accessories are available also.

SPECIFICATIONS


Input Voltage:	24VDC
Power Consumption:	5-18W Per Mtr
IP Rating:	IP67 / IP68
LED Classification:	SMD
Viewing Angle:	180°
Dimensions - Width:	11.5mm
Dimensions - Height:	29mm
Operating Temperature:	-5 - +55°C
Power Connector:	Factory Moulded or DIY Connector
Available Lengths:	Superlight can customise lengths as required

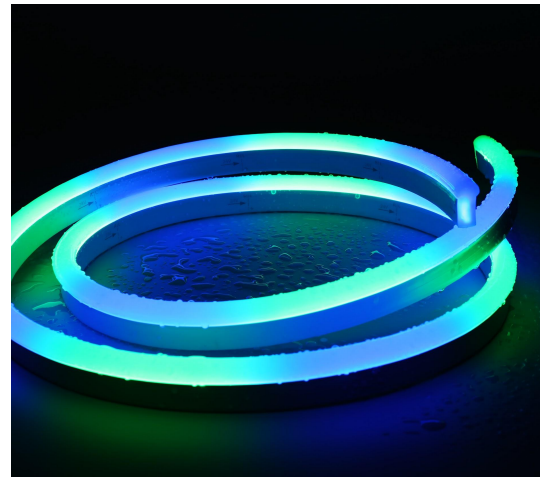

TYPICAL CONFIGURATIONS

- Tunable White
- 2200K
- 2700K
- 3000K
- 4000K
- RGB / RGBW

DIGITAL CHASING
DMX512/SPI

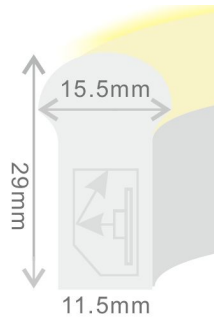

Colour tunable CCT, warm-dim, and other customised configurations available by request

APPLICATIONS

Bordering architecture, signage applications, outdoor decorative lighting, Direct linear lighting, coffer lighting, landscape linear lighting, water feature lighting, hotels, hospitality, venues, special effects, decorative installations,

CONTROL & DIMMING COMPATIBILITY

FLX970-DMX is a digital DMX512 enabled product that can perform animated chasing effects inc dynamic moving effects, pixel matrix effects, linear chasing, running and other special lighting effects. Controlled using SPI or DM512

ORDERING INFORMATION

FLX976	Flexlite 11.5x29mm
FLX976-91	Aluminium Mounting Channel - 1mtr
FLX976-92	Aluminium Mounting Channel - 2mtr
FLX976-91L	Aluminium Locking Channel - 2mtr
FLX976-75	35mm Aluminium Fixing Clip - pack 50pcs
FLX976-91F	Flexible Stainless Steel Channel - 1mtr

CUSTOMISATION OPTIONS

Lengths can be customised by Superlight according to site requirements
Factory injection moulded accessories available by request
Superlight can provide full solution inc digital DMX controller and LED drivers
Optional aluminium or PVC mounting track accessories available by request

All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.

