

SL2866 ARCHITECTURAL LED WALL LIGHT FIXTURE

Superlight SL2866 is a modern architectural wall light fixture suitable for high end projects. The fitting features integral LED driver and high efficiency LED components. The high grade body is finished in corrosion resistant powdercoat finish and is available in white or black.

SPECIFICATIONS

Input Voltage:	100-240VAC
Max Power Consumption:	3W / 6W / 12W / 53W
Depth From Wall:	53mm
Blade Dimensions (mm):	80x160 / 80x310 / 80x611 / 80x912
LED Classification:	Cree SMD
Colour/Finish:	Powdercoated
Fixture Material:	Aluminium
Typical Light Source Efficacy:	90lm/W
Beam Angle Options:	Adjustable Blade
Mounting Orientation:	Wall Mounted
Recommended Ambient Temp:	-10 ~ +40°C
IP Protection Rating:	IP20

PHOTOMETRIC INFORMATION

SL2866-15	CCT: 6000K CRI: >90
SL2866-17	CCT: 4000K CRI: >90
SL2866-21	CCT: 3000K CRI: >90

Detailed photometric report and IES files available by request

TYPICAL APPLICATIONS

Applications include architectural projects, exterior lighting, columns and pillars, interior projects, hotels and accommodation, public spaces, hospitality projects, restaurants, retail and showrooms, galleries.

CONTROL & DIMMING COMPATIBILITY

This product is available in dimmable configurations including Phase Dim, DALI, 1-10V, DMX512. Please contact us for options and availability.

INSTALLATION METHOD

SL2866 is a wall mounted LED fixture suitable for interior use. The product features an integral contact current LED driver.

ORDERING INFORMATION


SL2866/**-21	Superlight Up & Down LED Wall Light 3000K
SL2866/**-17	Superlight Up & Down LED Wall Light 4000K
SL2866/**-15	Superlight Up & Down LED Wall Light 6000K

CUSTOMISATION OPTIONS

LED CCT or special LED colour available by special request

Fixture colour can be refinished by special request

**Custom options may be subject to minimum order quantities

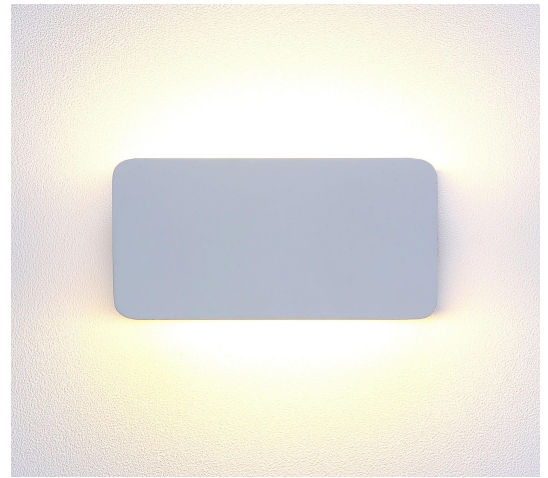

All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.