

SL2084 RECESSED HANDRAIL LUMINAIRE

Superlight SL2084 is a recessed handrail luminaire especially designed for recess mounting into square tube handrails and balustrades. The small SL2084 recessed handrail light fits seamlessly and discretely into the profile of any hollow square section. The SL2084 is available in several LED light configurations.

SPECIFICATIONS

Input Voltage:	24VDC
Power Consumption:	2W
Fitting Diameter:	33mm
Overall Depth:	39.5mm
LED Classification:	Luxeon LED
LED Quantity:	1
Colour/Finish:	Metallic
Fixture Material:	Stainless Steel
Typical Light Source Efficacy:	125lm/W
Beam Angle:	Asymmetrical °70
Compatible LED Drivers:	24VDC Constant Voltage
Recommended Ambient Temp:	-15 ~ +50°C
IP Protection Rating:	IP67

PHOTOMETRIC INFORMATION

SL2084-15	CCT: 6000K CRI: >90
SL2084-17	CCT: 4000K CRI: >90
SL2084-21	CCT: 3000K CRI: >90
SL2084-27	CCT: 2700K CRI: >90

Detailed photometric report and IES files available by request

TYPICAL APPLICATIONS


SL2084 is ideally suited for steel handrails >50x50mm with a steel wall thickness of 0.8-3.0mm. The fitting is designed to mount securely into steel handrail and operates with constant voltage 24VDC. Suits commercial, residential projects and also public spaces and industrial handrail installations.

CONTROL & DIMMING COMPATIBILITY

Superlight LED handrail systems can be integrated using the correct control interface inc DALI, 1-10V or Phase Dimming. Customised RGB versions available.

ORDERING INFORMATION

SL2084-15	SL2084 Recessed LED Handrail Fitting 2W LED 6000K
SL2084-17	SL2084 Recessed LED Handrail Fitting 2W LED 4000K
SL2084-21	SL2084 Recessed LED Handrail Fitting 2W LED 3000K
SL2084-27	SL2084 Recessed LED Handrail Fitting 2W LED 2700K

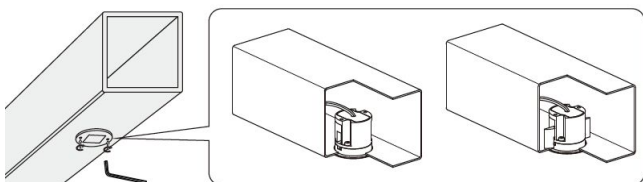

CUSTOMISATION OPTIONS

Fixture colour can be refinished by special request
 Fitting also available in RGB and RGBW configurations by special request
 **Custom options may be subject to minimum order quantities

All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.

