


SL2460 SQUARED RECESSED LED DOWNLIGHT

The Superlight SL2460 is a square architectural recessed LED downlight with a recessed light source aspect for reduced glare and aesthetic. The fitting body has an internal tilt adjustment for specific task lighting applications.

SPECIFICATIONS

Input Voltage:	220-240VAC
Power Consumption:	13W
Trim Dimensions:	102x102mm
Ceiling Cutout:	90mm
Fitting Depth:	130mm
LED Classification:	Sharp COB LED
Materials:	Aluminium Alloy 1090
Standard Baffle:	Black Internal Baffle
Typical Light Source Efficacy:	100lm/W
LED Beam Angle:	60°
LED Driver Power Factor:	>0.85
Recommended Ambient Temp:	-10 ~ +40°C
IP Protection Rating:	IP20

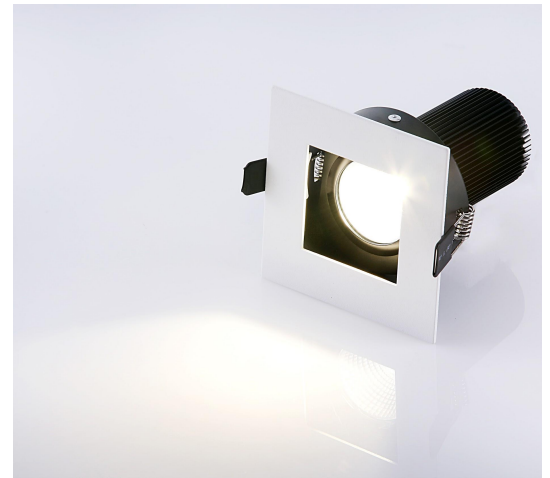

PHOTOMETRIC INFORMATION

SL2460-15	CCT: 6000K CRI: >90
SL2460-17	CCT: 4000K CRI: >90
SL2460-21	CCT: 3200K CRI: >90

Detailed photometric report and IES files available by request

TYPICAL APPLICATIONS

Residential projects, retail and shopfitting projects, common areas, general purpose lighting, kitchen lighting, commercial spaces.

CONTROL & DIMMING COMPATIBILITY

SL2460 LED downlights are supplied with phase control dimmable LED drivers

Optional DALI dimmable LED driver is available by special request

Optional 1-10V dimmable LED driver is available by special request

ORDERING INFORMATION

SL2460-21	Superlight Square Recessed LED Downlight 12W 3200K
SL2460-17	Superlight Square Recessed LED Downlight 12W 4000K
SL2460-15	Superlight Square Recessed LED Downlight 12W 6000K

CUSTOMISATION OPTIONS

Fixture trim colour can be refinished by special request

**Custom options may be subject to minimum order quantities

All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.