


## SL3694 EXTERIOR LED WALL LIGHT

The 3690 series wall lights are IP65 rated for all outdoor areas. They are very low energy fittings consuming less than 3 watts each. They incorporate ribbed reflector panels for smooth indirect lighting of pathways, steps, landscape applications, walkways, public areas etc. The fittings operate with 240V so no additional power supply or transformer is required. Suitable for all commercial & residential projects.

### SPECIFICATIONS

Input Voltage:	240V
Max Power Consumption:	3W
LED Quantity:	24
LED Classification:	Super Bright 3648 LED
Standard Viewing Angle:	120°
Trim Dimensions:	171mm x 105mm
Fitting Depth:	65mm
Operating Temperature:	-10°C ~ +65°C
Weight:	0.74Kg
IP Protection Rating:	IP65

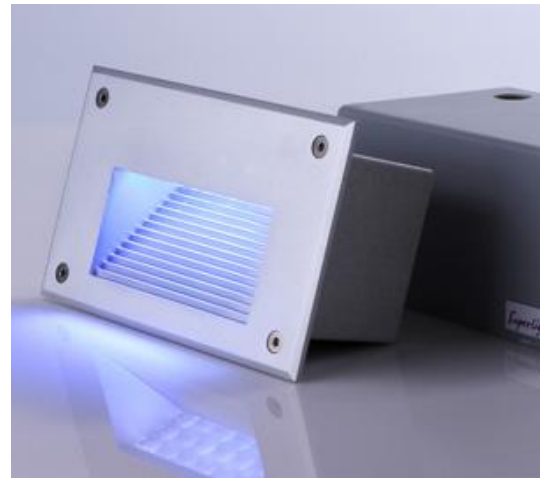

### PHOTOMETRIC INFORMATION

SL3694-11	Typical Wavelength: RED 650nm
SL3694-12	Typical Wavelength: GREEN 560nm
SL3694-13	Typical Wavelength: BLUE 450nm
SL3694-15	CCT: 6500K CRI: >70
SL3694-21	CCT: 3200K CRI: >75

Detailed photometric report and IES files available by request

### TYPICAL APPLICATIONS

Commercial & residential landscape lighting, Exterior steplighting.

### CONTROL & DIMMING COMPATIBILITY

This product is available in dimmable configurations including Phase Dim, DALI, 1-10V, DMX512. Please contact us for options and availability.

### ORDERING INFORMATION

SL3694-11	IP65 Recessed LED Wall Light RED
SL3694-12	IP65 Recessed LED Wall Light GREEN
SL3694-13	IP65 Recessed LED Wall Light BLUE
SL3694-14	IP65 Recessed LED Wall Light AMBER
SL3694-15	IP65 Recessed LED Wall Light COOL WHITE

### CUSTOMISATION OPTIONS

Trim Colour can be refinished

12/24VDC RGB version also available

Low voltage conversion available by request

Customisation options are subject to availability and minimum order quantities

All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.