

## SUPERLIGHT SL6062 LED BOLLARD FIXTURE

Superlight SL6062 LED is a high quality LED bollard fixture for garden and landscape lighting applications. The fitting is constructed from high-grade materials and is suited for any commercial or residential project.

### SPECIFICATIONS

Input Voltage:	100-240VAC
Max Power Consumption:	10W
Overall Height:	940mm
Bollard Profile Dimensions:	120x50mm
LED Classification:	Superlight High Power LED
LED Quantity:	1
Colour/Finishes:	Opal Grey / Charcoal
Fixture Material:	Extruded Alloy
Typical Light Source Efficacy:	75lm/W
Included Accessories:	Mounting Bracket Included
Recommended Ambient Temp:	-10 ~ +50°C
IP Protection Rating:	IP64

### PHOTOMETRIC INFORMATION

SL6062-15	CCT: 6500K CRI >80
SL6062-17	CCT: 4000K CRI >80
SL6062-21	CCT: 3000K CRI >80

Detailed photometric report and IES files available by request

### TYPICAL APPLICATIONS

Apartment complexes, garden & landscape lighting, public spaces, pathways, parks, driveways.

### CONTROL & DIMMING COMPATIBILITY

This product is available in dimmable configurations including Phase Dim, DALI, 1-10V, DMX512. Please contact us for options and availability.

### ORDERING INFORMATION


SL6062GY-21	Bollard 800mm OPAL GREY IP64 100-240VAC 10W 3000K
SL6062GY-17	Bollard 800mm OPAL GREY IP64 100-240VAC 10W 4000K
SL6062GY-15	Bollard 800mm OPAL GREY IP64 100-240VAC 10W 6500K
SL6062CH-21	Bollard 800mm CHARCOAL IP64 100-240VAC 10W 3000K
SL6062CH-17	Bollard 800mm CHARCOAL IP64 100-240VAC 10W 4000K
SL6062CH-15	Bollard 800mm CHARCOAL IP64 100-240VAC 10W 6500K

### CUSTOMISATION OPTIONS

Fixture height can be customised by special request

Colour can be refinished by special request

\*\*Custom options may be subject to minimum order quantities

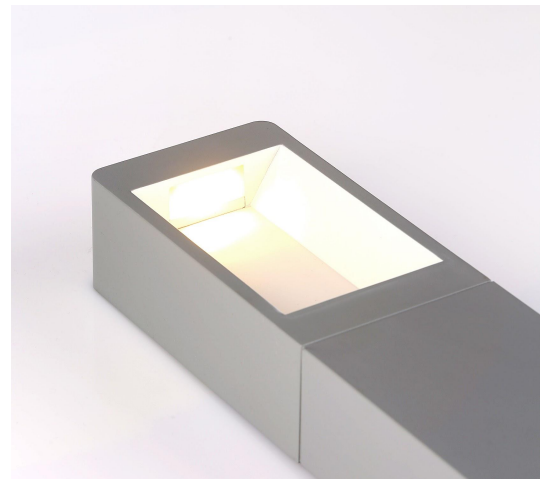

All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.