

SUPERLIGHT CITY FACADE LINEAR LED FITTING SL9639

SL9639 is a slimline linear LED luminaire with high quality components and strong powerful illumination. City-Facade is IP66 rated and available in several lengths and configurations. Excellent for facade lighting, wall washing, exterior or interior projects and multiple units can create continuous linear lighting installations. SL9639 can be configured with optional glare visor and special options.

SPECIFICATIONS

Series Model Number:	SL9639
Input Voltage:	24VDC
Power Consumption:	12W / 24W / 36W
Nominal Fixture Lengths:	500mm / 1000mm
Included Accessory:	Adjustable Brackets, Lead in Cable
Fixture Material:	High Density Anodised Aluminium
LED Classification:	Nichia SMD2835/SMD5050
Typical Light Source Efficacy:	135lm/W
Light Source CRI:	>90
Beam Angle Options:	15° / 50° / 35x25°
Recommended Ambient Temp:	-20 ~ +55° C
IP Protection Rating:	IP66

PHOTOMETRIC INFORMATION

SL9639	● CCT: 6000K CRI: >90	
SL9639	● CCT: 4000K CRI: >90	
SL9639	● CCT: 3000K CRI: >90	
SL9639	RGB / RGBW	

Detailed photometric report and IES files available by request

TYPICAL APPLICATIONS

Wall-washing, Grazing projects, Building facade lighting, landscape lighting, architectural highlighting, commercial projects, hotels & hospitality projects, residential applications, signage and feature lighting, theatres and venues.

CONTROL & DIMMING COMPATIBILITY

Superlight City Facade luminaires are dimmable via PWM control and can be controlled vis any Superlight constant voltage PWM dimming interface, Typical options include Superlight 1-10V Analogue, DALI, or DMX512 RGB/RGBW version is controllable with any Superlight 12/24VDC Colour Controller




ORDERING INFORMATION

SL9639L500	Facade Linear LED Luminaire IP66 24VDC 500mm
SL9639L1000	Facade Linear LED Luminaire IP66 24VDC 1000mm
SL9639GL500	Glare Louvre for 500mm Luminaire
SL9639GL1000	Glare Louvre for 1000mm Luminaire
LED Configuration	Single colour inc 2700K / 3000K / 4000K / 5000K
Optional RGB/W	RGB / RGBW DMX512 Version with Built in DMX Decoder


CUSTOMISATION OPTIONS

- Colour can be refinished by special request
- RGBW configuration can be with on-board DMX512
- Custom options may be subject to minimum order quantities



All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.

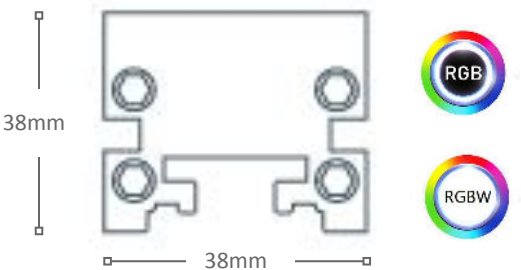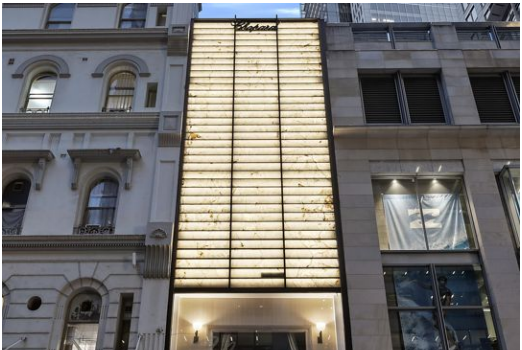

RGB / RGBW Profile Dimensions

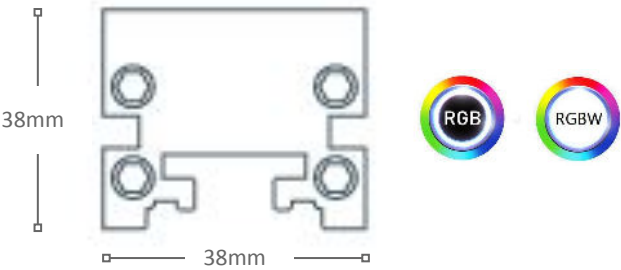

Single Color Profile Dimensions

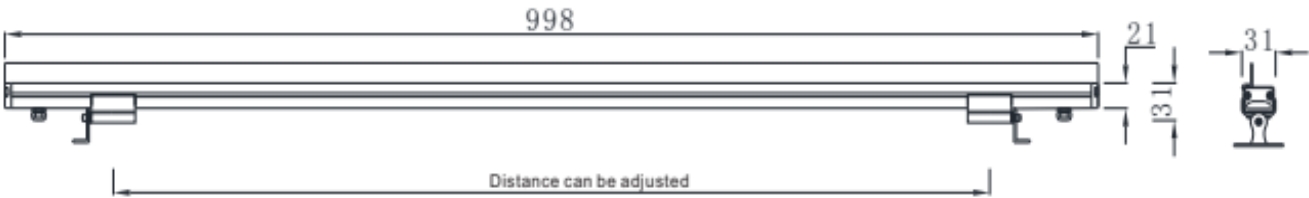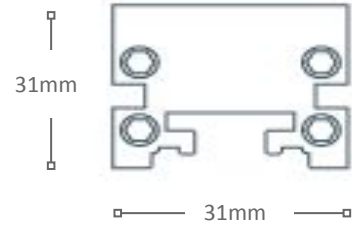

All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details prior to ordering.