

WG85 RECESSED LED STEPLIGHT LUMINAIRE

WG85, a high-quality recessed LED wall steplight, embodies the pinnacle of locally designed & manufactured Outdoor LED Lighting. Its sleek, recessed design ensures seamless integration into any architectural interior project, providing both safety and aesthetic appeal. This innovative solution redefines indoor LED lighting, offering unparalleled durability and illumination for hallways and staircase lighting..

SPECIFICATIONS

Input Voltage:	100-240V
Max Power Consumption:	3 Watts
LED Quantity:	Single
LED Classification:	CREE High Power XR 3W
LED Driver:	Constant Current
Trim Dimensions:	85x85mm
Wall Cutout:	58mm ROund Cutout
Standard Trim Colour/Finish:	Matt White
Lens:	Frosted Glass
Colour Temperature (cw/ww):	2700K / 3000K / 4000K / 5000K
Low Energy:	Yes
IP Protection Rating:	IP40
INstallation TYpe:	Recessed, Plaster/Gyprock Wall
Mounting Configuration	Wall Mounted

PHOTOMETRIC INFORMATION

WG85 2700K	● CCT: 2700K	CRI >85
WG85 3000K	● CCT: 3000K	CRI >85
WG85 4000K	● CCT: 4000K	CRI >85
WG85 5000K	● CCT: 5000K	CRI >80

CRI 90/95 available by special request



TYPICAL APPLICATIONS

Applications include accent lighting, task lighting, ambient lighting, display lighting, and architectural lighting, enhancing aesthetics, functionality, and atmosphere in commercial, residential, and hospitality environments.

CONTROL & DIMMING COMPATIBILITY

Available with non-dimmable or dimmable LED driver
Phase dimmable / DALI / DALI-2 / Tunable
Analogue dimmable and wireless control option also available

ORDERING INFORMATION

WG85-2700K	Recessed LED Wall/Step Light CCT: 2700K
WG85-3000K	Recessed LED Wall/Step Light CCT: 3000K
WG85-4000K	Recessed LED Wall/Step Light CCT: 4000K
WG85-5000K	Recessed LED Wall/Step Light CCT: 5000K
WG85-5000K	Recessed LED Wall/Step Light CCT: 6500K
Custom versions can be manufactured by request	


CUSTOMISATION OPTIONS

Available in White / Black / Custom finish by special request
Tunable CT and DIM-to Warm Options by Special request
Can be supplied with dimmable LED Driver options by request
**Some custom options may be subject to minimum quantities

Specification noted are typical values and may vary depending on exact configuration ordered. All product specifications are subject to change without notice. Superlight accepts no liabilities as a result of errors, updates or omissions. Please re-confirm all product details and specifications at the time of ordering.



DIMENSIONS & INSTALLATION CONFIGURATION

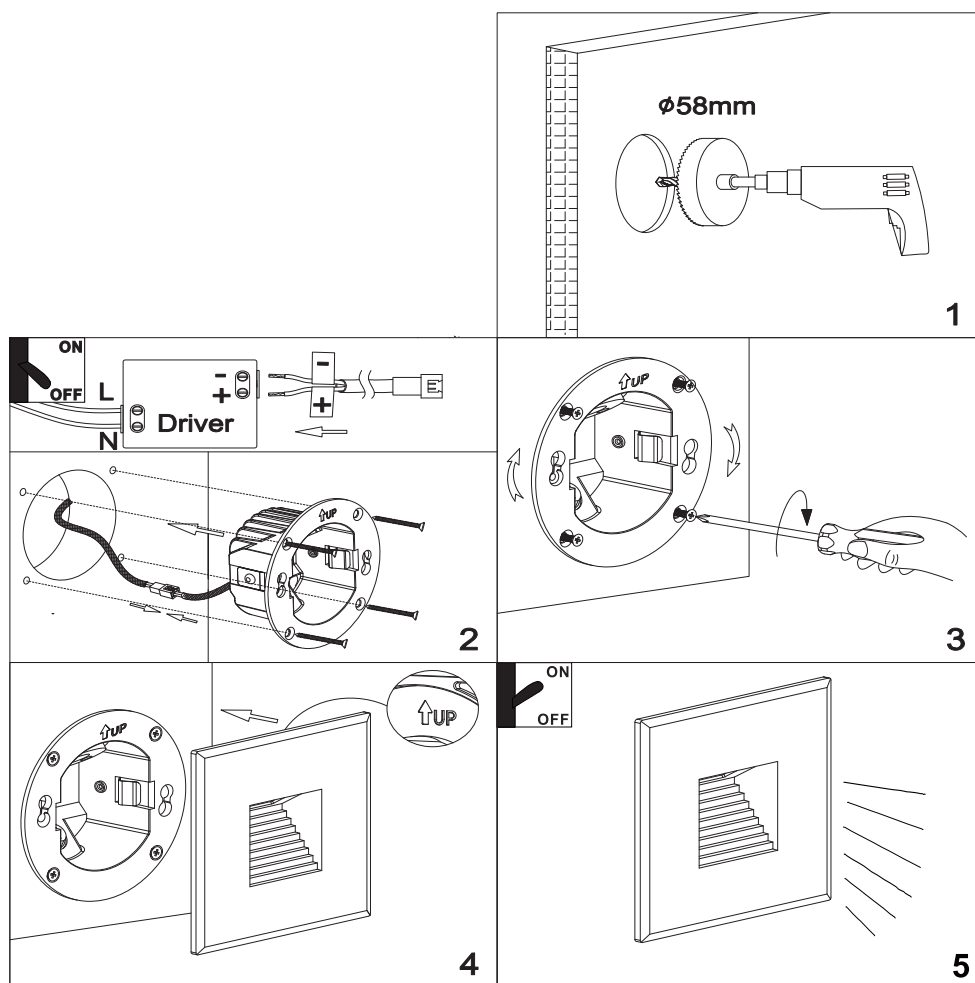

OPTIONAL FACIA CONFIGURATIONS:

